

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐
(highlight changes)

APPLICATION FOR PERMIT TO DRILL			5. MINERAL LEASE NO: ML-21577	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>			7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>			8. UNIT or CA AGREEMENT NAME: UNIT #891008900A	
2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE L.P.			9. WELL NAME and NUMBER: NBU 1021-32E	
3. ADDRESS OF OPERATOR: 1368 S 1200 E CITY VERNAL STATE UT ZIP 84078		PHONE NUMBER: (435) 781-7024		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 1858'FNL, 651'FWL 621205x 39.906256 AT PROPOSED PRODUCING ZONE: 4418105x -109.582069			11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNW 32 10S 21E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 16 MILES SOUTH OF OURAY, UTAH			12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 651'		16. NUMBER OF ACRES IN LEASE: 640.00		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40.00
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) REFER TO TOPO C		19. PROPOSED DEPTH: 9,210		20. BOND DESCRIPTION: RLB0005237
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5330'GL		22. APPROXIMATE DATE WORK WILL START:		23. ESTIMATED DURATION:

24. PROPOSED CASING AND CEMENTING PROGRAM							
SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
12 1/4"	9 5/8	32.3#	H-40	1,900	265 SX CLASS G	1.18 YIELD	15.6 PPG
7 7/8"	4 1/2	11.6#	I-80	9,210	1950 SX CLASS G	1.31 YIELD	14.3 PPG

25. ATTACHMENTS	
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:	
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER

NAME (PLEASE PRINT) SHEILA UPCHEGO TITLE SENIOR LAND ADMIN SPECIALIST
SIGNATURE *[Signature]* DATE 3/13/2007

(This space for State use only)

API NUMBER ASSIGNED: 43-047-39138

Approved by the
Utah Division of
Oil, Gas and Mining

APPROVAL:

Date: 06-25-07
By: *[Signature]*

RECEIVED
MAR 16 2007
DIV. OF OIL, GAS & MINING

T10S, R21E, S.L.B.&M.

1/2" Rebar 0.6' High,
Pile of Stones, Set
Stone

1977 Brass Cap,
0.8' High, Pile of
Stones


N89°55'18"E - 5356.30' (Meas.)

Kerr-McGee Oil & Gas Onshore LP

Well location, NBU #1021-32E, located as shown in the SW 1/4 NW 1/4 of Section 32, T10S, R21E, S.L.B.&M., Uintah County, Utah.


BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

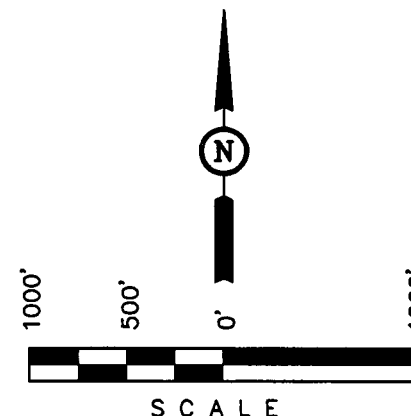

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEY MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



T10S

T11S

Set Marked Stone, Pile of Stones
S00°23'08"W - 5317.83' (Meas.)

Set Marked Stone 1.5' High, Pile of Stones

S89°56'43"E - 2668.59' (Meas.)

1977 Brass Cap, Flush W/ Pile of Stones

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

LEGEND:

└ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

(NAD 83)

LATITUDE = 39°54'22.14" (39.906150)

LONGITUDE = 109°34'57.69" (109.582692)

(NAD 27)

LATITUDE = 39°54'22.26" (39.906183)

LONGITUDE = 109°34'55.21" (109.582003)

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 12-07-06	DATE DRAWN: 12-12-06
PARTY L.K. J.M. S.L.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE Kerr-McGee Oil & Gas Onshore LP	

**NBU 1021-32E
SW/NW SEC. 32, T10S, R21E
UINTAH COUNTY, UTAH
ML-21577**

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1023'
Top of Birds Nest Water	1251'
Mahogany	1773'
Wasatch	4175'
Mesaverde	7050'
MVU2	8056'
MVL1	8554'
TD	9210'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Water	Green River	1023'
	Top of Birds Nest Water	1251'
	Mahogany	1773'
Gas	Wasatch	4175'
Gas	Mesaverde	7050'
Gas	MVU2	8056'
Gas	MVL1	8554'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

Please refer to the attached Drilling Program.

4. Proposed Casing & Cementing Program:

Please refer to the attached Drilling Program.

5. Drilling Fluids Program:

Please refer to the attached Drilling Program.

6. Evaluation Program:

Please refer to the attached Drilling Program.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 9210' TD, approximately equals 5710 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3684 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

Please refer to the attached Drilling Program.

10. **Other Information:**

Please refer to the attached Drilling Program.



KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

COMPANY NAME KERR-McGEE OIL & GAS ONSHORE LP DATE March 13, 2007
 WELL NAME NBU 1021-32E TD 9,210' MD/TVD
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,330' GL KB 5,345'
 SURFACE LOCATION SW/NW SEC. 32, T10S, R21E 1858'FNL, 651'FWL BHL Straight Hole
 Latitude: 39.906150 Longitude: 109.582692
 OBJECTIVE ZONE(S) Wasatch/Mesaverde
 ADDITIONAL INFO Regulatory Agencies: UDOGM (SURF & MINERALS), BLM, Tri-County Health Dept.

GEOLOGICAL FORMATION			MECHANICAL		
LOGS	TOPS	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'		14"	
			12-1/4"	9-5/8", 32.3#, H-40, STC	Air mist
Catch water sample, if possible, from 0 to 4,175'					
	Green River @	1,023'			
	Top of Birds Nest Water @	1251'			
	Mahogany @	1,773'			
	Preset f/ GL @				
	1,900' MD				
Note: 12.25" surface hole will usually be drilled ±400' below the bottom of lost circulation zone. Drilled depth may be ±200' of the estimated set depth depending on the actual depth of the loss zone.					
Mud logging program TBD					
Open hole logging program f/ TD - surf csg					
	Wasatch @	4,175'	7-7/8"	4-1/2", 11.6#, I-80 or equivalent LTC casing	Water/Fresh Water Mud 8.3-11.3 ppg
	Mverde @	7,050'			
	MVU2 @	8,056'			
	MVL1 @	8,554'			
	TD @	9,210'			Max anticipated Mud required 11.3 ppg



KERR-McGEE OIL & GAS ONSHORE LP **DRILLING PROGRAM**

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 1900	32.30	H-40	STC	0.67*****	1.54	4.73
PRODUCTION	4-1/2"	0 to 9210	11.60	I-80	LTC	2.30	1.17	201000

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point))
2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
(Burst Assumptions: TD = 11.3 ppg) .22 psi/ft = gradient for partially evac wellbore
(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)
MASP 3386 psi
***** Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE Option 1	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE Option 2		NOTE: If well will circulate water to surface, option 2 will be utilized					
	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite +.25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,670'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	400	60%	11.00	3.38
	TAIL	5,540'	50/50 Poz/G + 10% salt + 2% gel +.1% R-3	1550	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER:

Brad Laney


DATE:

DRILLING SUPERINTENDENT:

Randy Bayne

DATE:

5M BOP STACK and CHOKE MANIFOLD SYSTEM

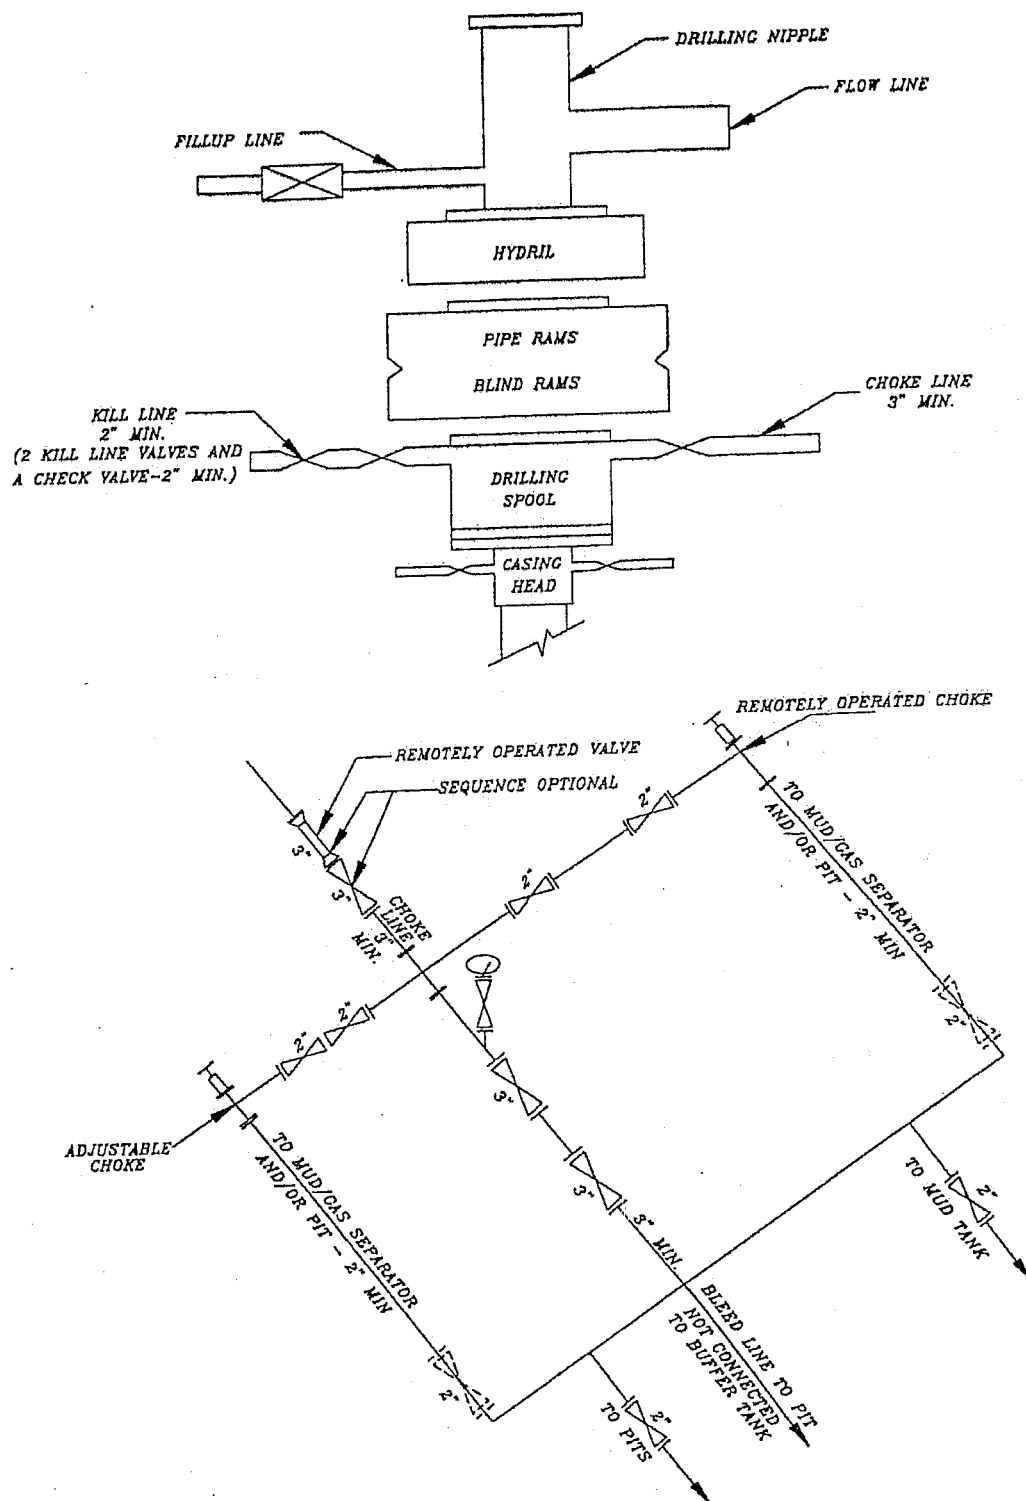

**NBU 1021-32E
SW/NW SEC. 32, T10S, R21E
Uintah County, UT
ML-21577**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

Refer to Topo Maps A and B for location of access roads within a 2 mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

Approximately 130' +/- of new access road is proposed. Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities were determined at the on-site.

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. Location of Existing Wells Within a 1-Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain

fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Carlsbad Canyon, standard color number 2.5Y 6/2.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 68' +/- of 4" steel pipeline is proposed. Please refer to the attached Topo Map D for pipeline placement.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner and felt will be used, it will be a minimum of 20 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E.

8. Ancillary Facilities:

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance

between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling of the well due to current rig availability. If the proposed location is not large enough to accommodate the drilling rig the location will be re-surveyed and a Form 9 shall be submitted.

10. Plans for Reclamation of the Surface:

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

A plastic, nylon reinforced liner will be used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. Surface Ownership:

SITLA
675 East 500 South, Suite 500
Salt Lake City, UT 84102

12. Other Information:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey will be submitted when report becomes available.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it within 460' of any non-committed tract lying within the boundaries of the Unit.

13. Lessee's or Operators's Representative & Certification:

Sheila Upchego
Senior Land Admin Specialist
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East.
Vernal, UT 84078
(435) 781-7024

Randy Bayne
Drilling Manager
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435)781-7018


Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by State Surety Bond #RLB0005237.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Sheila Upchego

3/13/2007

Date

Kerr-McGee Oil & Gas Onshore LP

NBU #1021-32E

SECTION 32, T10S, R21E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; TURN LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 15.6 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTH; TURN LEFT AND PROCEED IN A NORTHERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHWEST; TURN LEFT AND PROCEED IN AN NORTHWESTERLY DIRECTION APPROXIMATELY 298' TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTHWEST; FOLLOW ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 130' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 48.4 MILES.

Kerr-McGee Oil & Gas Onshore LP

NBU #1021-32E

LOCATED IN UINTAH COUNTY, UTAH
SECTION 32, T10S, R21E, S.L.B.&M.

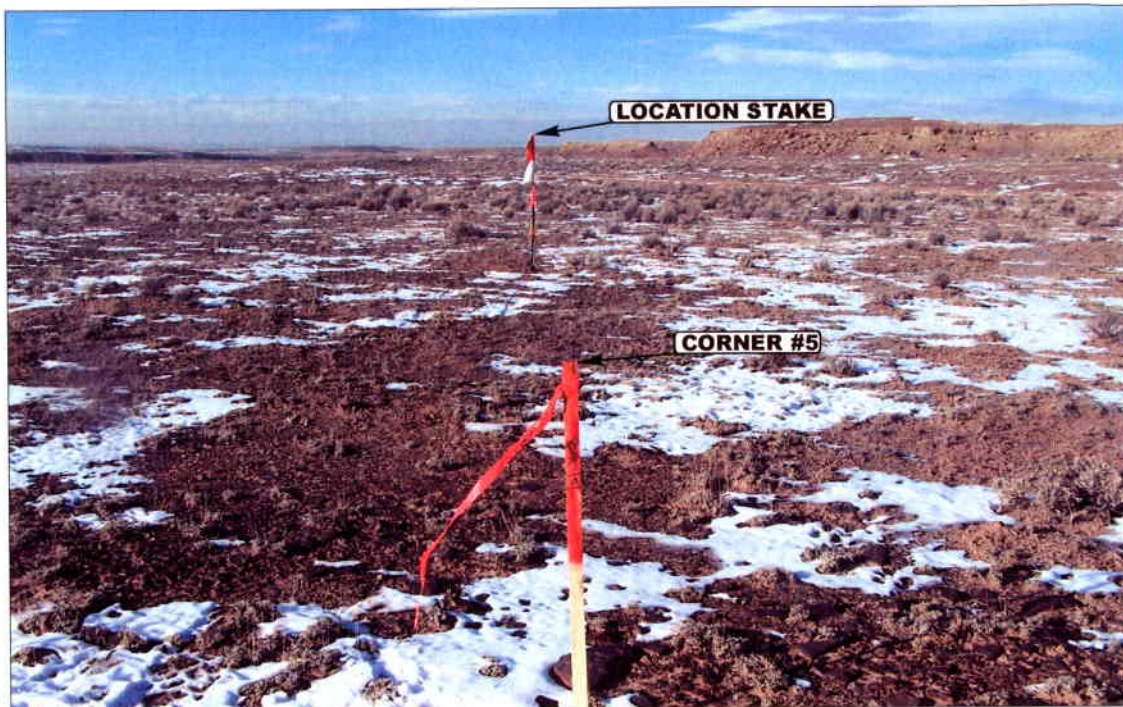


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHWESTERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


12 13 06
MONTH DAY YEAR

PHOTO

TAKEN BY: L.K.

DRAWN BY: A.A.

REVISED: 00-00-00

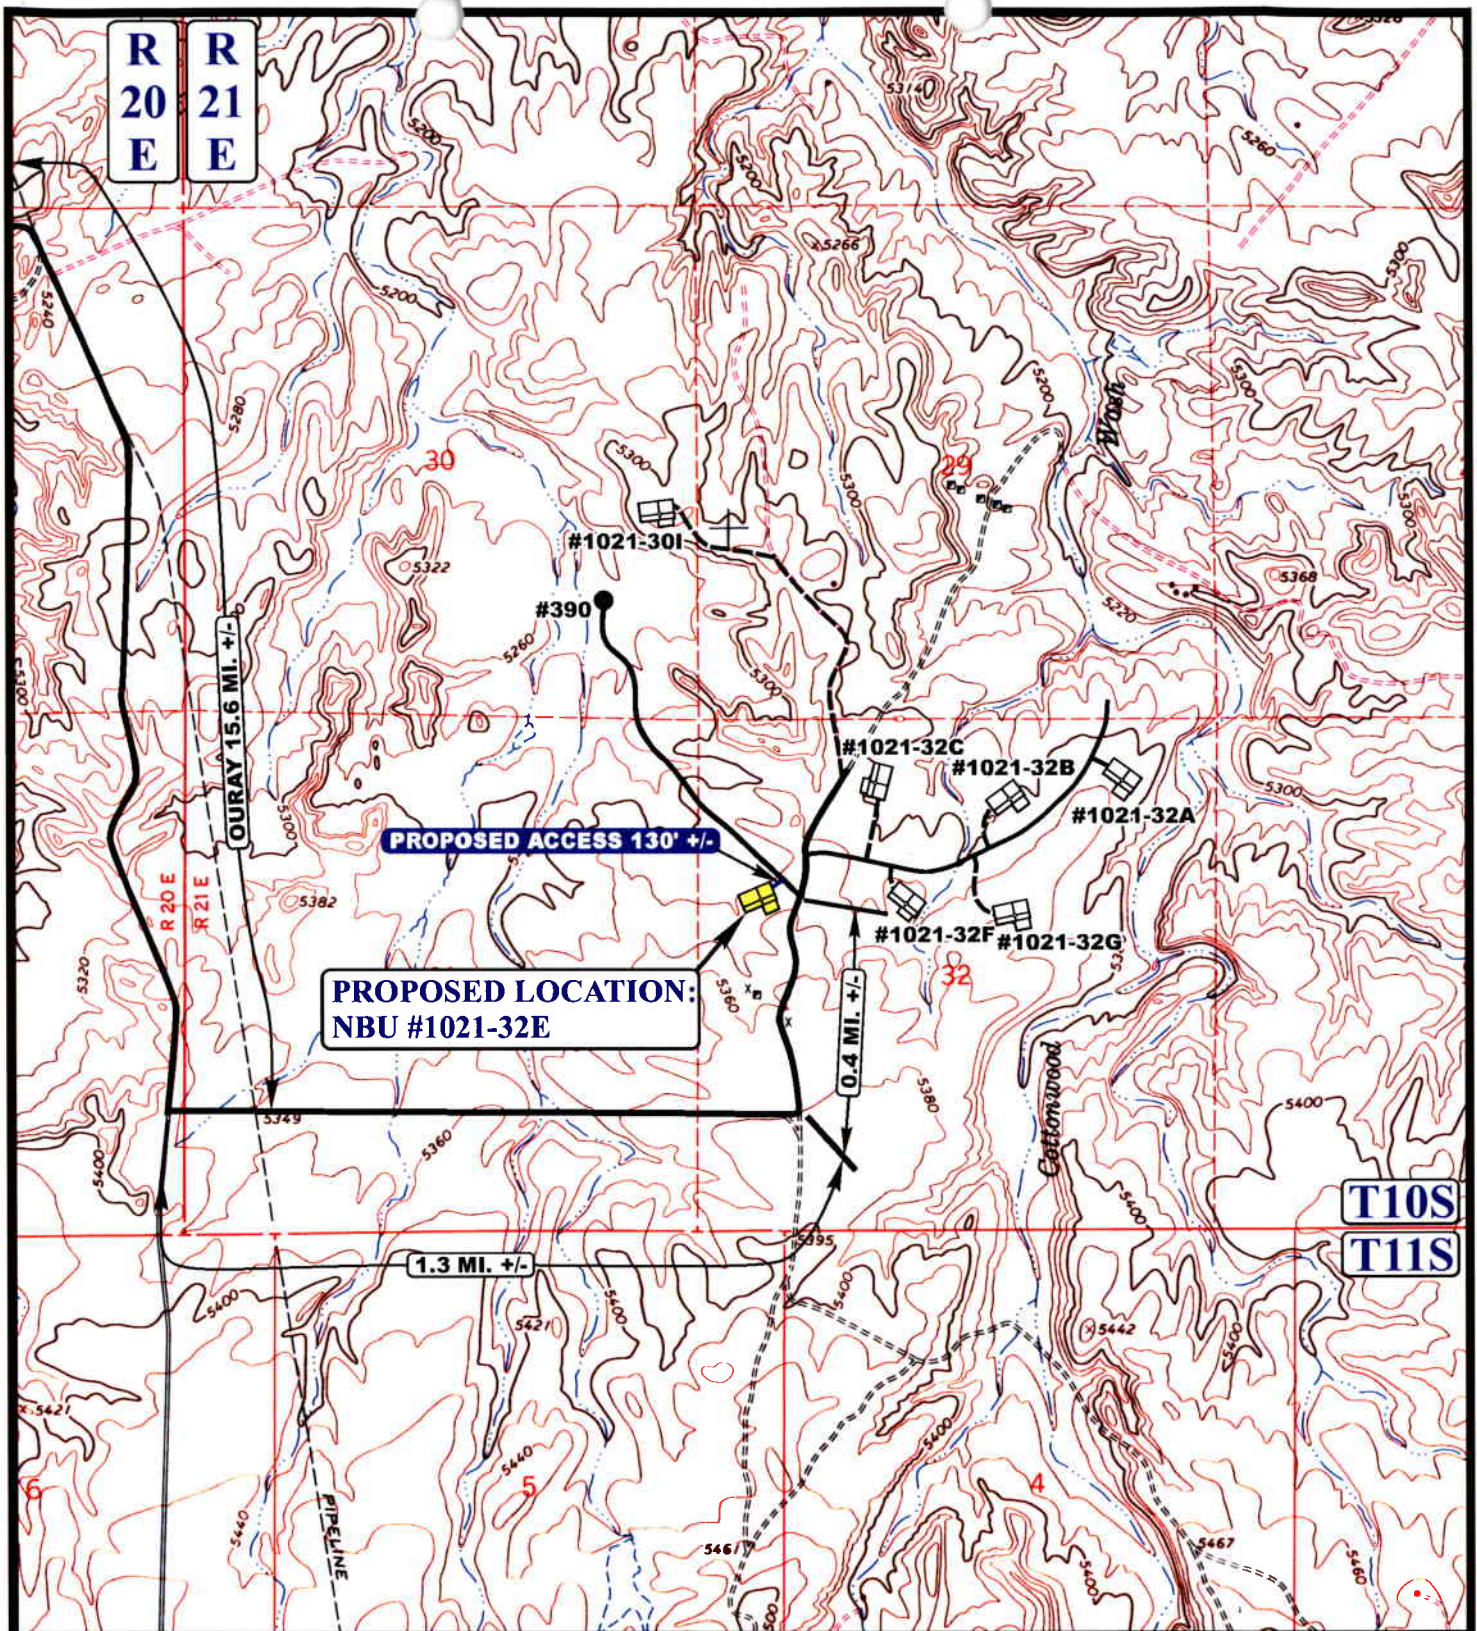

LEGEND:

EXISTING ROAD
 PROPOSED ACCESS ROAD

Kerr-McGee Oil & Gas Onshore LP

NBU #1021-32E

SECTION 32, T10S, R21E, S.L.B.&M.

1858' FNL 651' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC
MAP


12 **13** **06**
 MONTH DAY YEAR

SCALE: 1" = 2000'

DRAWN BY: A.A.

REVISED: 00-00-00

B
 TOPO

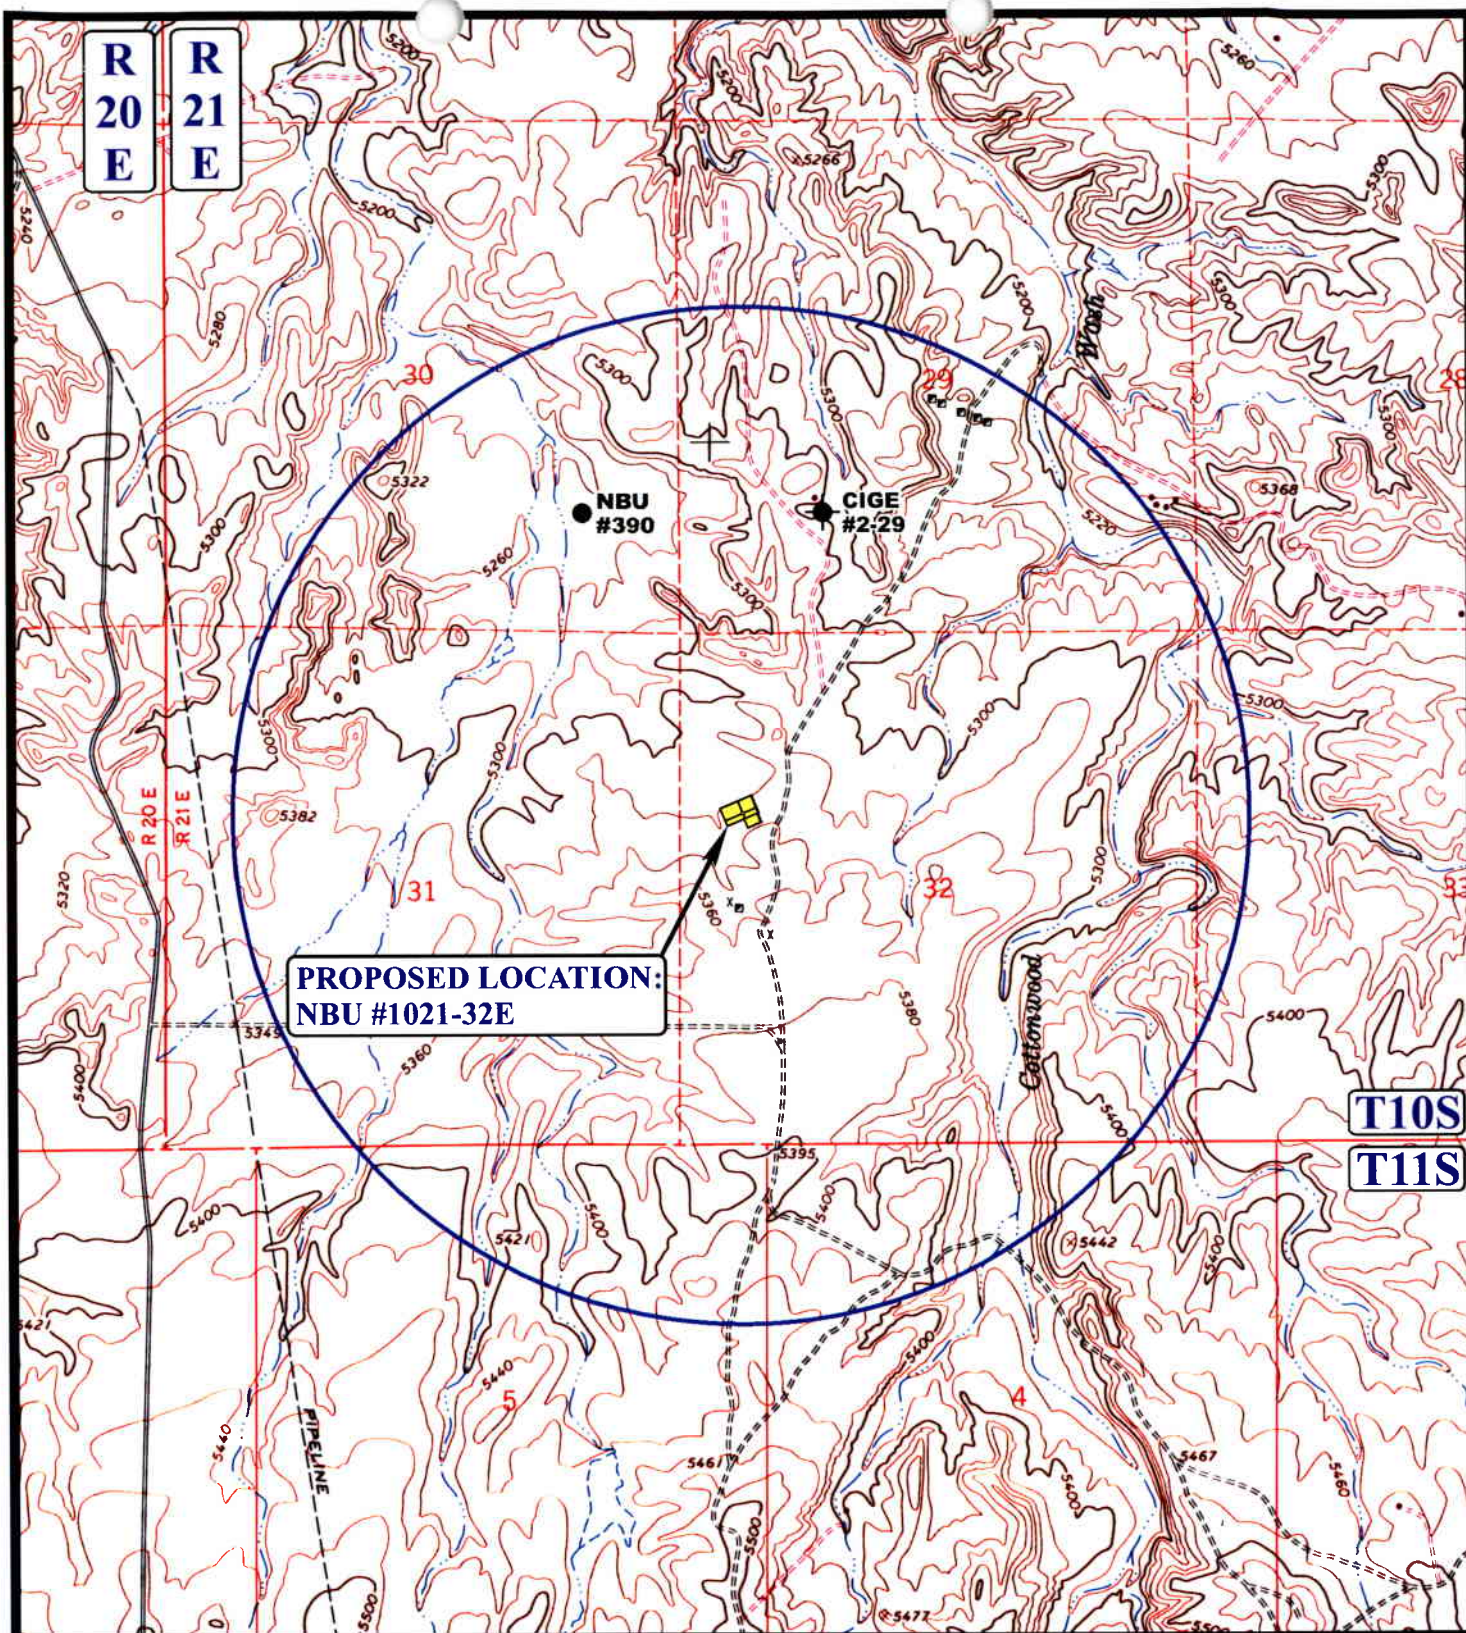

LEGEND:

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

N

Kerr-McGee Oil & Gas Onshore LP

NBU #1021-32E

SECTION 32, T10S, R21E, S.L.B.&M.

1858' FNL 651' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP


12 13 06
 MONTH DAY YEAR

SCALE: 1" = 2000'

DRAWN BY: A.A.

REVISED: 00-00-00



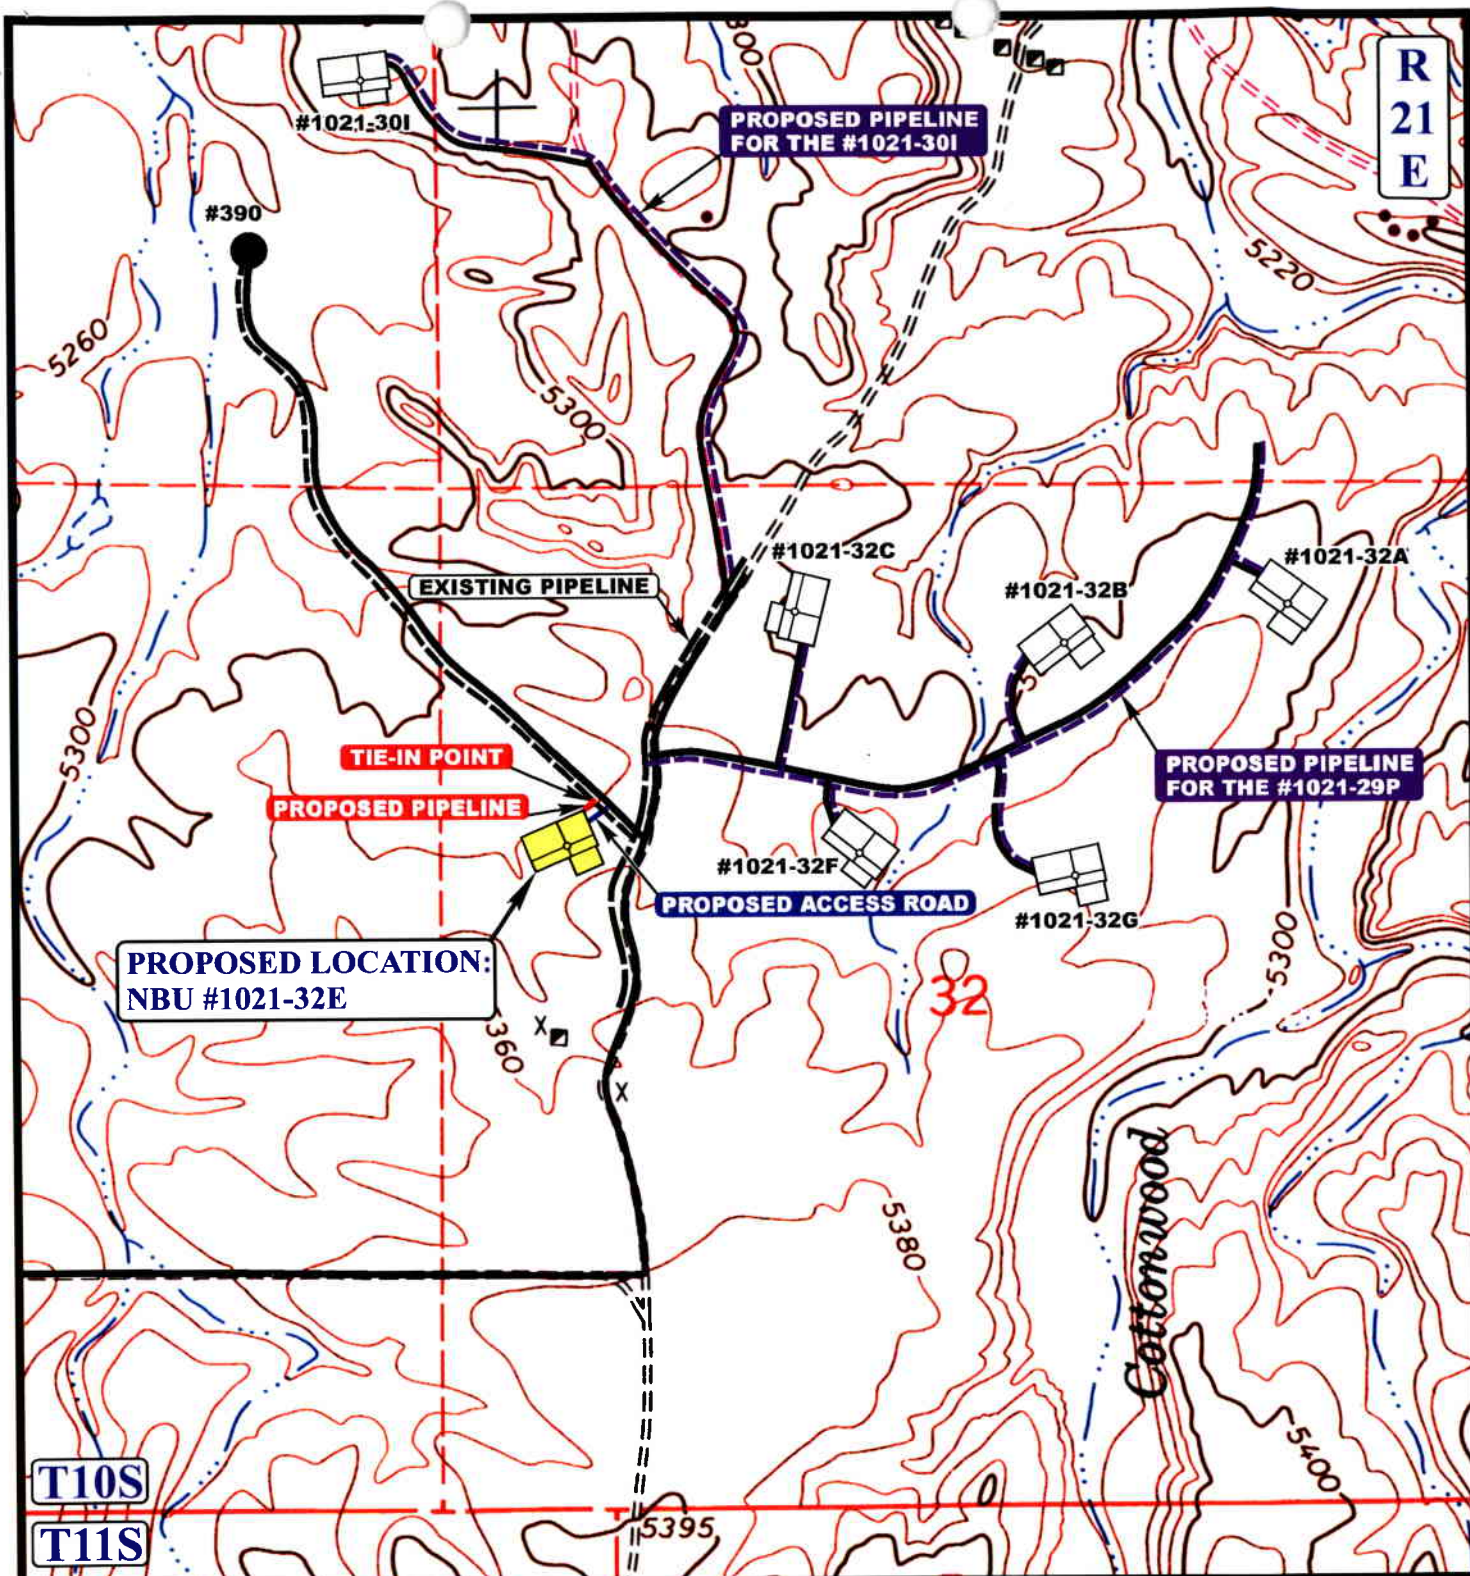

APPROXIMATE TOTAL PIPELINE DISTANCE = 68' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- - - - PROPOSED PIPELINE

N

Kerr-McGee Oil & Gas Onshore LP

NBU #1021-32E
SECTION 32, T10S, R21E, S.L.B.&M.
1858' FNL 651' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

12 13 06
 MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: A.A. REVISED: 00-00-00

D
TOPO

Kerr-McGee Oil and Gas Onshore LP

NBU #1021-32E

PIPELINE ALIGNMENT

LOCATED IN UINTAH COUNTY, UTAH

SECTION 32, T10S, R21E, S.L.B.&M.



PHOTO: VIEW FROM TIE-IN POINT

CAMERA ANGLE: SOUTHWESTERLY



— Since 1964 —

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS

12 13 06
MONTH DAY YEAR

PHOTO

TAKEN BY: L.K.

DRAWN BY: A.A.

REVISED: 00-00-00

FIGURE #1


1858' FNL 651' FWL

Approx.
Toe of
Fill Slope

F-3.8'
El. 26.0'

C-2.4'
El. 32.2'

C-0.5'
El. 30.3'




SCALE: 1" = 50'
DATE: 12-12-06
Drawn By: S.L.

NOTE:

***Flare Pit is to be located
a min. of 100' from the
Well Head.***

Approx.
Top of
Cut Slope



Topsoil Stockpile

PIPE TUBS

PIPE RACKS

C-0.5'
El. 30.3'

Sta. 1+50

F-4.3
El. 25.5'

TOILET ☐

TRAILER

WATER TANK ○

Sta. 0+50

Sta. 0+00

F-4.2'
El. 25.6'

Proposed Access Road

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5330.3'
FINISHED GRADE ELEV. AT LOC. STAKE = 5329.8'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

Kerr-McGee Oil & Gas Onshore LP


FIGURE #2

TYPICAL CROSS SECTIONS FOR

NBU #1021-32E






SECTION 32, T10S, R21E, S.L.B.&M.

1858' FNL 651' FWL



DATE: 12-12-06

Drawn By: S.L.

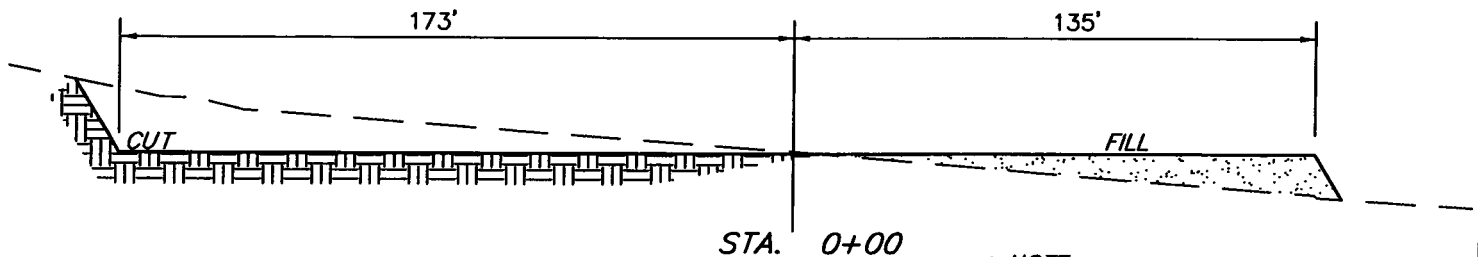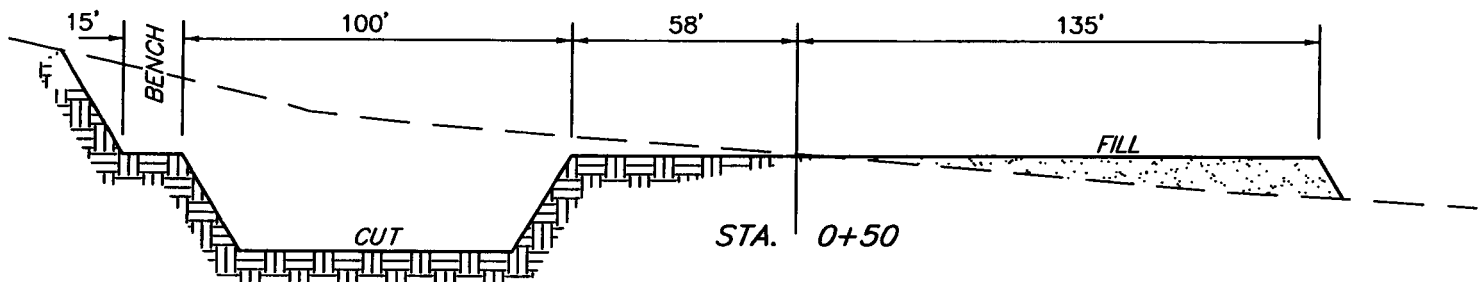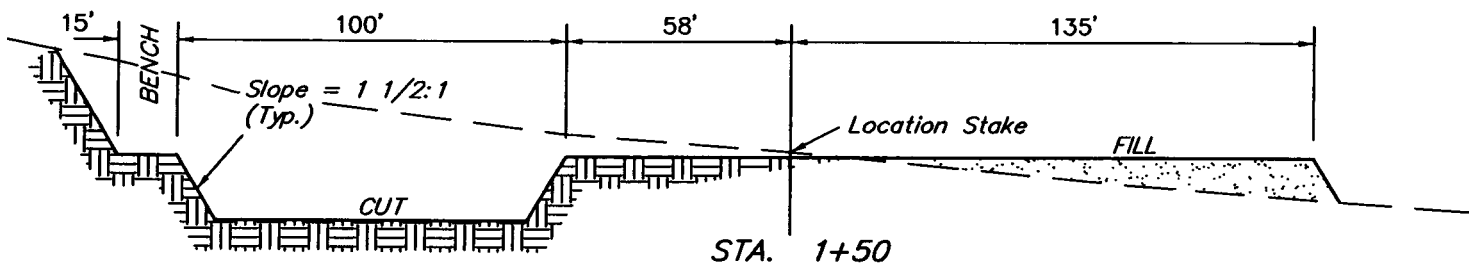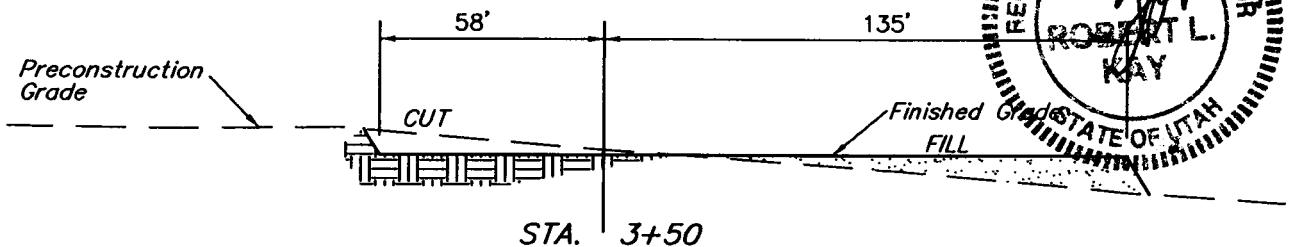

* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 2,100 Cu. Yds.
Remaining Location	= 8,950 Cu. Yds.
TOTAL CUT	= 11,050 CU.YDS.
FILL	= 4,970 CU.YDS.

EXCESS MATERIAL	= 6,080 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 4,240 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 1,840 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 03/16/2007

API NO. ASSIGNED: 43-047-39138

WELL NAME: NBU 1021-32E

OPERATOR: KERR-MCGEE OIL & GAS (N2995)

PHONE NUMBER: 435-781-7024

CONTACT: SHEILA UPCHEGO

PROPOSED LOCATION:

SWNW 32 100S 210E

SURFACE: 1858 FNL 0651 FWL

BOTTOM: 1858 FNL 0651 FWL

COUNTY: UINTAH

LATITUDE: 39.90626 LONGITUDE: -109.5821

UTM SURF EASTINGS: 621205 NORTHINGS: 4418105

FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /

Tech Review

Initials

Date

Engineering

DKU

4/24/07

Geology

Surface

LEASE TYPE: 3 - State

LEASE NUMBER: ML-21577

SURFACE OWNER: 3 - State

PROPOSED FORMATION: WSMVD

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat

☒ Bond: Fed[] Ind[] Sta[] Fee[]
(No. 22013542)

☒ Potash (Y/N)

☒ Oil Shale 190-5 (B) or 190-3 or 190-13

☒ Water Permit
(No. 43-8496)

☒ RDCC Review (Y/N)
(Date:)

☒ Fee Surf Agreement (Y/N)

☒ Intent to Commingle (Y/N)

LOCATION AND SITING:

R649-2-3.

Unit: NATURAL BUTTES

R649-3-2. General

Siting: 460' From Qtr/Qtr & 920' Between Wells

R649-3-3. Exception

☒ Drilling Unit

Board Cause No: 173-14

Eff Date: 12-2-99

Siting: 440' fr N. 64° E & UNC. Comm. Tract

R649-3-11. Directional Drill

COMMENTS:

Needs Permit (04-04-07)

STIPULATIONS:

1- STATEMENT OF BASIS

2- OIL SHALE

3- Surface Csg Cont Stop

Application for Permit to Drill

Statement of Basis

4/16/2007

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Ownr	CBM
338	43-047-39138-00-00		GW	S	No
Operator	KERR-MCGEE OIL & GAS ONSHORE, LP	Surface Owner-APD			
Well Name	NBU 1021-32E	Unit			
Field	UNDESIGNATED	Type of Work			
Location	SWNW 32 10S 21E S 1858 FNL 651 FWL GPS Coord (UTM) 621205E 4418105N				

Geologic Statement of Basis

Kerr McGee proposes to set 1,900' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 4,300'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 32. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. Production casing cement should be brought up above the base of the moderately saline ground water to isolate it from fresher waters uphole.

Brad Hill
APD Evaluator

4/16/2007
Date / Time

Surface Statement of Basis

The general area is within the Love area of the Natural Buttes Unit in the upper Cottonwood Wash Drainage. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 11 miles to the White River. No seeps, springs or streams exist in the area.

This location is approximately 18 miles southeast of Ouray, Utah and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within 330 feet of the proposed site. New construction will be required from this point.

The proposed location is on mostly flat terrain with a gentle slope to the north. No drainage concerns exist. Cottonwood Wash is about 3/4 mile to the east.

Both the surface and minerals are owned by SITLA. Jim Davis represented SITLA at the pre-site investigation. Mr. Davis had no concerns pertaining to this location. The selected location appears to be the best site for drilling and operating a well in the immediate area.

Floyd Bartlett
Onsite Evaluator

4/4/2007
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator KERR-MCGEE OIL & GAS ONSHORE, LP
Well Name NBU 1021-32E
API Number 43-047-39138-0 **APD No** 338 **Field/Unit** UNDESIGNATED
Location: 1/4,1/4 SWNW **Sec** 32 **Tw** 10S **Rng** 21E 1858 FNL 651 FWL
GPS Coord (UTM) 621211 4418102 **Surface Owner**

Participants

Floyd Bartlett (DOGM), Jim Davis (SITLA), Carroll Estes, Tony Keznic, and Clay Einerson (Kerr McGee), David Kay (Uintah Engineering and Land Surveying), and Ben Williams (UDWR)

Regional/Local Setting & Topography

The general area is within the Love area of the Natural Buttes Unit in the upper Cottonwood Wash Drainage. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 11 miles to the White River. No seeps, springs or streams exist in the area.

This location is approximately 18 miles southeast of Ouray, Utah and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within 330 feet of the proposed site. New construction will be required from this point.

The proposed location is on mostly flat terrain with a gentle slope to the north. No drainage concerns exist. Cottonwood Wash is about 3/4 mile to the east.

Both the surface and minerals are owned by SITLA.

Surface Use Plan

Current Surface Use

Grazing
Recreational
Wildlife Habitat

New Road

Miles	Well Pad		Src Const Material	Surface Formation
0.005	Width 308	Length 350	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate? Y

Environmental Parameters


Affected Floodplains and/or Wetland N

Flora / Fauna

Vegetation is a desert shrub type. A stand of mat saltbrush, Gardner saltbrush, shadscale, curly mesquite, horsebrush, bud sage and spring annuals is present.

Antelope, cattle, rabbits, coyotes, and small mammals, birds and raptors.

Casing Schematic

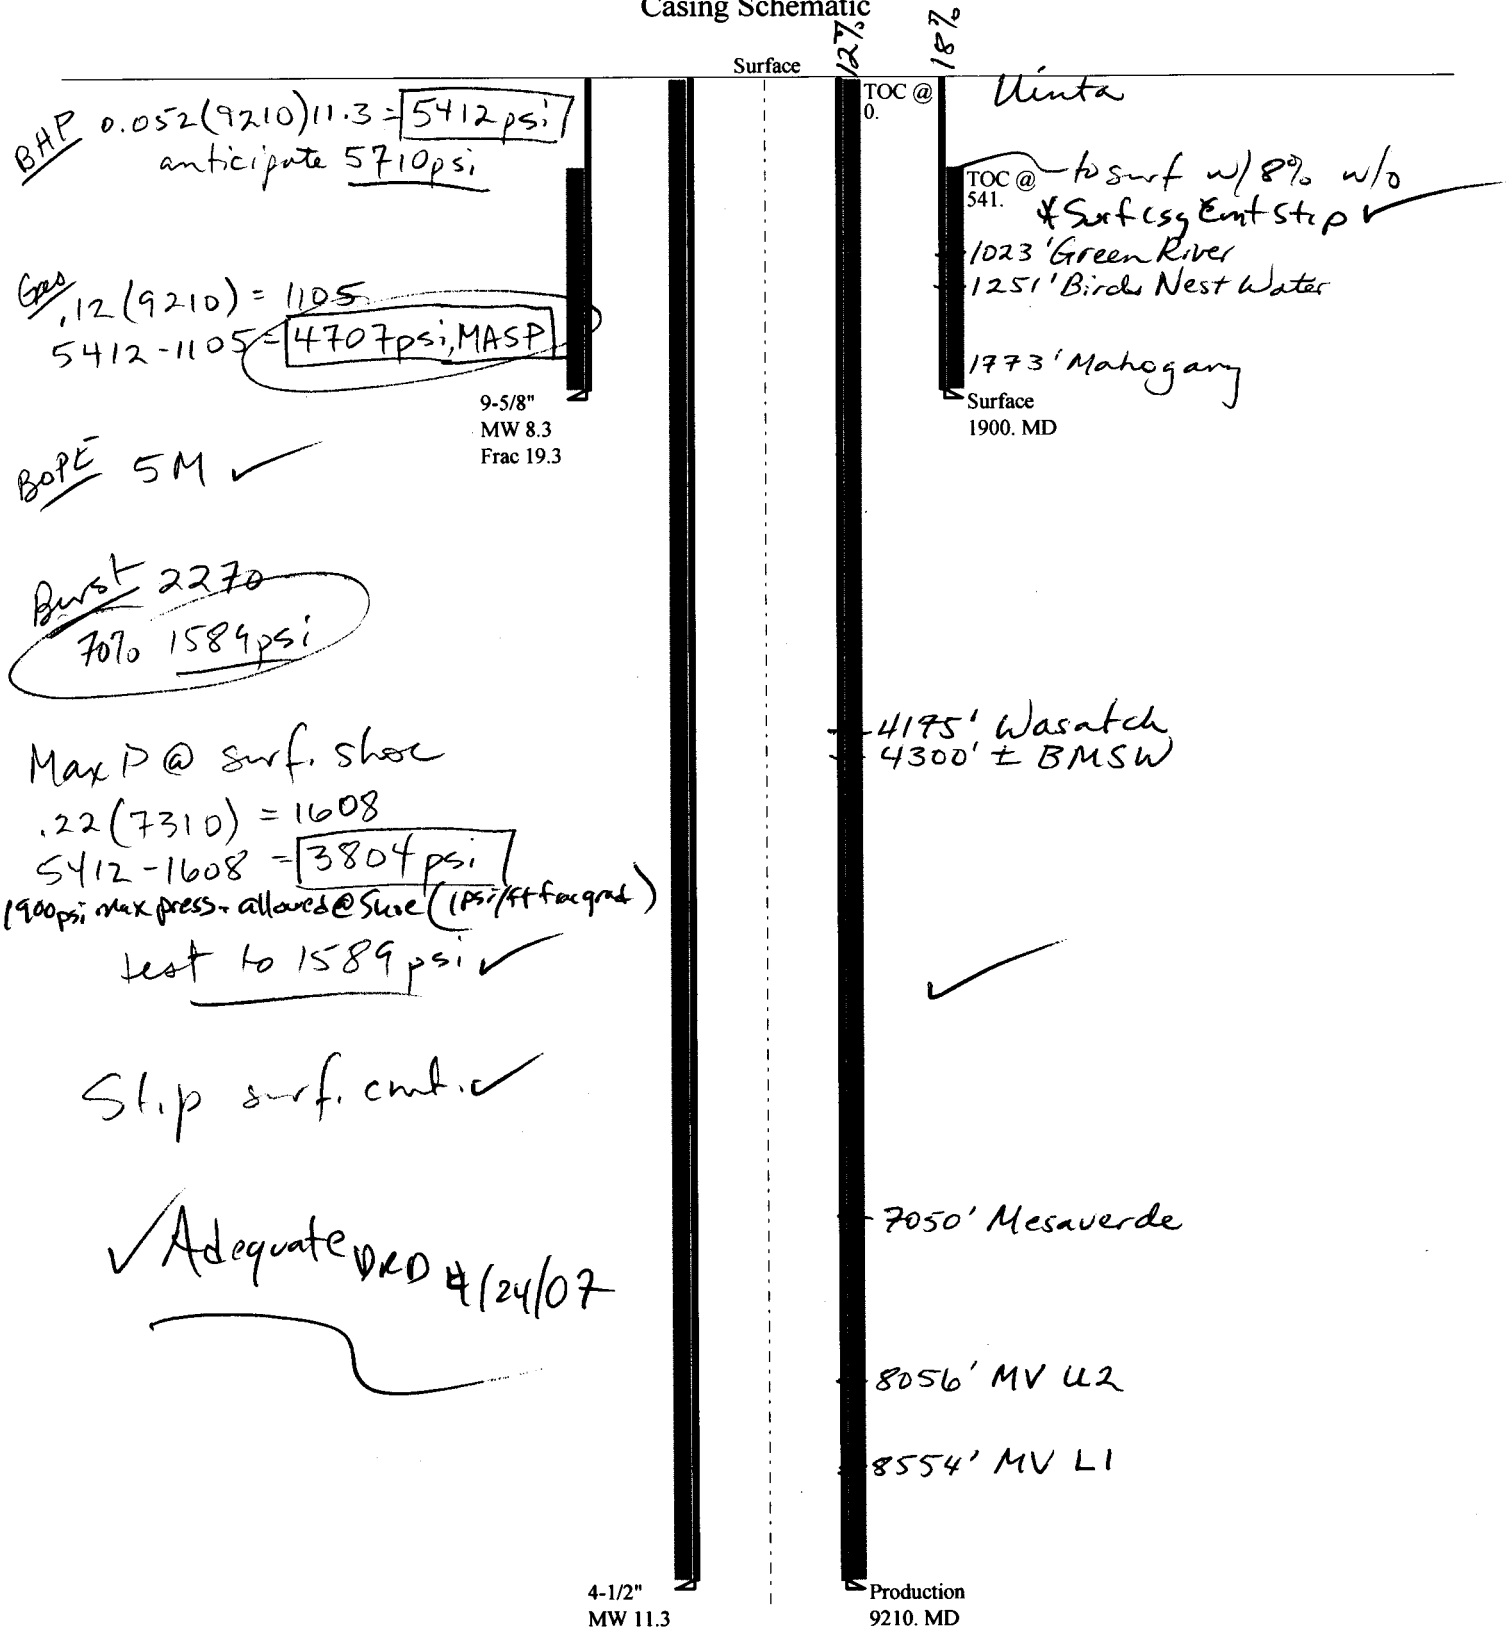

Soil Type and Characteristics

Shallow sandy loam.

Erosion Issues N**Sedimentation Issues** N**Site Stability Issues** N**Drainage Diversion Required** N**Berm Required?** N**Erosion Sedimentation Control Required?** N**Paleo Survey Run?** Y **Paleo Potential Observed?** N **Cultural Survey Run?** N **Cultural Resources?****Reserve Pit****Site-Specific Factors****Site Ranking**

Distance to Groundwater (feet)	>200	0
Distance to Surface Water (feet)	>1000	0
Dist. Nearest Municipal Well (ft)	>5280	0
Distance to Other Wells (feet)	300 to 1320	10
Native Soil Type	Mod permeability	10
Fluid Type	Fresh Water	5
Drill Cuttings	Normal Rock	0
Annual Precipitation (inches)	<10	0
Affected Populations	<10	0
Presence Nearby Utility Conduits	Not Present	0

Final Score 25 1 **Sensitivity Level****Characteristics / Requirements**

The proposed reserve pit is 100' x 150' x 10' deep located in a cut on the southeast corner of the location. A 20 mil liner with a felt sub-liner is planned by Kerr McGee.

Closed Loop Mud Required? N **Liner Required?** Y **Liner Thickness** 16 **Pit Underlayment Required?** Y**Other Observations / Comments**

Ben Williams representing the UDWR stated the area is classified as yearlong critical habitat for antelope. He stated that the lack of water not forage is the limiting factor affecting the herd in the area. He recommended no restrictions for antelope. No other wildlife is expected to be significantly affected. He gave Jim Davis of SITLA and Carroll Estes of Kerr McGee a copy of his wildlife evaluation and a UDWR recommended seed mix to be used when re-vegetating the location.

ATV's were used to access the site.

Floyd Bartlett
Evaluator

4/4/2007
Date / Time

Well name:	2007-04 Kerr McGee NBU 1021-32E	
Operator:	Kerr McGee Oil & Gas Onshore L.P.	
String type:	Surface	Project ID: 43-047-39138
Location:	Uintah County, Utah	

Design parameters:
Collapse

Mud weight: 8.300 ppg
Design is based on evacuated pipe.

Minimum design factors:
Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 102 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,400 ft

Cement top: 541 ft

Burst

Max anticipated surface pressure: 1,672 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 1,900 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on buoyed weight.

Neutral point: 1,668 ft

Non-directional string.
Re subsequent strings:

Next setting depth: 9,240 ft
Next mud weight: 11.300 ppg
Next setting BHP: 5,424 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 1,900 ft
Injection pressure: 1,900 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	1900	9.625	32.30	H-40	ST&C	1900	1900	8.876	839.5

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	819	1370	1.672	1900	2270	1.19	54	254	4.71 J

Prepared Helen Sadik-Macdonald
by: Div of Oil, Gas & Minerals

Phone: (801) 538-5357
FAX: (801) 359-3940

Date: April 19, 2007
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 1900 ft, a mud weight of 8.3 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:

2007-04 Kerr McGee NBU 1021-32EOperator: **Kerr McGee Oil & Gas Onshore L.P.**String type: **Production**

Project ID:

43-047-39138Location: **Uintah County, Utah****Design parameters:****Collapse**Mud weight: 11.300 ppg
Design is based on evacuated pipe.**Minimum design factors:****Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Environment:H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 204 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Cement top: Surface

BurstMax anticipated surface
pressure: 3,380 psi
Internal gradient: 0.220 psi/ft
Calculated BHP 5,406 psi

No backup mud specified.

Tension:8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)**Non-directional string.**

Tension is based on buoyed weight.

Neutral point: 7,654 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	9210	4.5	11.60	I-80	LT&C	9210	9210	3.875	803.7
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	5406	6360	1.176	5406	7780	1.44	89	212	2.39 J

Prepared Helen Sadik-Macdonald
by: Div of Oil, Gas & MineralsPhone: (801) 538-5357
FAX: (801) 359-3940Date: April 19, 2007
Salt Lake City, Utah**Remarks:**

Collapse is based on a vertical depth of 9210 ft, a mud weight of 11.3 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

March 27, 2007

Memorandum

To: Assistant District Manager Minerals, Vernal District
From: Michael Coulthard, Petroleum Engineer
Subject: 2007 Plan of Development Natural Buttes Unit Uintah
County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2007 within the Natural Buttes Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
-------	-----------	----------

(Proposed PZ Wasatch/MesaVerde)

43-047-39107	NBU 1021-13N Sec 13 T10S R21E 0948 FSL 1602 FWL	
43-047-39108	NBU 1021-13H Sec 13 T10S R21E 2351 FNL 0515 FEL	
43-047-39109	NBU 1021-16D Sec 16 T10S R21E 0666 FNL 0666 FWL	
43-047-39106	NBU 1021-28I Sec 28 T10S R21E 2269 FSL 0930 FEL	
43-047-39100	NBU 1021-28F Sec 28 T10S R21E 1767 FNL 2157 FWL	
43-047-39101	NBU 1021-28E Sec 28 T10S R21E 2046 FNL 0856 FWL	
43-047-39102	NBU 1021-28D Sec 28 T10S R21E 0604 FNL 0614 FWL	
43-047-39103	NBU 1021-28C Sec 28 T10S R21E 0476 FNL 1997 FWL	
43-047-39104	NBU 1021-28B Sec 28 T10S R21E 0767 FNL 1997 FEL	
43-047-39110	NBU 1021-29P Sec 29 T10S R21E 0286 FSL 1236 FEL	
43-047-39111	NBU 1021-31A Sec 31 T10S R21E 0744 FNL 0815 FEL	
43-047-39116	NBU 1021-31B Sec 31 T10S R21E 0777 FNL 1911 FEL	
43-047-39136	NBU 1021-32G Sec 32 T10S R21E 2038 FNL 2065 FEL	
43-047-39137	NBU 1021-32D Sec 32 T10S R21E 0777 FNL 0355 FWL	
43-047-39138	NBU 1021-32E Sec 32 T10S R21E 1858 FNL 0651 FWL	
43-047-39139	NBU 1022-19P Sec 19 T10S R22E 0766 FSL 0298 FEL	
43-047-39141	NBU 1022-24J Sec 24 T10S R22E 1928 FSL 1972 FEL	
43-047-39140	NBU 1022-24P Sec 24 T10S R22E 1110 FSL 1054 FEL	
43-047-39142	NBU 1022-25G Sec 25 T10S R22E 1761 FNL 1462 FEL	
43-047-39033	NBU 1022-25H Sec 25 T10S R22E 2604 FNL 0825 FEL	
43-047-39156	NBU 1022-24O Sec 24 T10S R22E 0645 FSL 2007 FEL	
43-047-39157	NBU 1022-7I Sec 07 T10S R22E 2000 FSL 0948 FEL	

Page 2

Our records indicate the NBU 1021-28I and the NBU 1022-25H are closer than 460 feet from the Natural Buttes Unit boundary (approximately 390 and 36 feet respectively).

We have no objections to permitting the wells so long as the unit operator receives an exception to the locating and siting requirements of the State of Utah (R649-3-2).

/s/ Michael L. Coulthard

bcc: File – Natural Buttes Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:3-27-07

From: Ed Bonner
To: Mason, Diana
Date: 6/22/2007 10:23 AM
Subject: Well Clearance

CC: Davis, Jim; Garrison, LaVonne; Hill, Brad; Hunt, Gil

The following wells have been given cultural resources clearance by the Trust Lands Cultural Resources Group:

EOG Resources, Inc

Chapita Wells Unit 1330-32 (API 43 047 39293)
Chapita Wells Unit 1326-32 (API 43 047 39294)
Chapita Wells Unit 1327-32 (API 43 047 39295)
Chapita Wells Unit 1325-32 (API 43 047 39296)
Chapita Wells Unit 1331-32 (API 43 047 39300)
Chapita Wells Unit 1328-32 (API 43 047 39301)

Kerr McGee Oil & Gas Onshore LP

NBU 1021-19M (API 43 047 38150)
NBU 1021-32A (API 43 047 39026)
NBU 1021-32B (API 43 047 39027)
NBU 1021-32C (API 43 047 39028)
NBU 1021-32F (API 43 047 39029)
NBU 1021-32P (API 43 047 39127)
NBU 1021-32O (API 43 047 39128)
NBU 1021-32N (API 43 047 39129)
NBU 1021-32M (API 43 047 39130)
NBU 1021-32L (API 43 047 39131)
NBU 1021-32K (API 43 047 39132)
NBU 1021-32J (API 43 047 39133)
NBU 1021-32I (API 43 047 39134)
NBU 1021-32H (API 43 047 39135)
NBU 1021-32G (API 43 047 39136)
NBU 1021-32D (API 43 047 39137)
NBU 1021-32E (API 43 047 39138)

Parallel Petroleum Corporation

Trail Creek Anticline 1-2-6-25 (API 43 047 38324)

QEP Uinta Basin Inc

GB 7SG-36-8-21 (API 43 047 38765)

If you have any questions regarding this matter please give me a call.



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil Gas and Mining

JOHN R. BAZA
Division Director

June 25, 2007

Kerr-McGee Oil & Gas Onshore, LP
1368 South 1200 East
Vernal, UT 84078

Re: Natural Buttes Unit 1021-32E Well, 1858' FNL, 651' FWL, SW NW, Sec. 32,
T. 10 South, R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39138.

Sincerely,

Gil Hunt
Associate Director

er
Enclosures

cc: Uintah County Assessor
Bureau of Land Management Vernal Office
SITLA

Operator: Kerr-McGee Oil & Gas Onshore, LP
Well Name & Number Natural Buttes Unit 1021-32E
API Number: 43-047-39138
Lease: ML 21577

Location: SW NW **Sec.** 32 **T.** 10 South **R.** 21 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

The operator is required to notify the Division of Oil, Gas and Mining of the following action during drilling of this well:

- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- 24 hours prior to testing blowout prevention equipment – contact Dan Jarvis
- 24 hours prior to spudding the well – contact Carol Daniels
- Within 24 hours of any emergency changes made to the approved drilling program – contact Dustin Doucet
- Prior to commencing operations to plug and abandon the well – contact Dan Jarvis

The operator is required to get approval from the Division of Oil, Gas and Mining before performing any of the following actions during the drilling of this well:

- Plugging and abandonment or significant plug back of this well – contact Dustin Doucet
- Any changes to the approved drilling plan – contact Dustin Doucet

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at: (801) 538-5338 office (801) 942-0873 home
- Carol Daniels at: (801) 538-5284 office
- Dustin Doucet at: (801) 538-5281 office (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.
5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)
6. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.
7. Surface casing shall be cemented to the surface.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-21577
2. NAME OF OPERATOR: Kerr-McGee Oil & Gas Onshore, LP		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: NA
3. ADDRESS OF OPERATOR: PO Box 173779 CITY Denver STATE CO ZIP 80217-3779		7. UNIT or CA AGREEMENT NAME: Natural Buttes Unit
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1858 FNL & 651 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNW 32 10S 21E		8. WELL NAME and NUMBER: NBU 1021-32E
PHONE NUMBER: (720) 929-6171		9. API NUMBER: 4304739138
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT: Natural Buttes Field
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr McGee Oil and Gas Onshore, LP respectfully request a one year extension for NBU 1021-32E, in order to complete drilling operations. The Utah Division of Oil, Gas, and Mining initially approved this APD on 6/25/2007.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 07-08-08
By: [Signature]

COPY SENT TO OPERATOR

Date: 7.9.2008
Initials: KS

NAME (PLEASE PRINT) <u>Victoria Marques</u>	TITLE <u>Regulatory Intern</u>
SIGNATURE <u>Victoria Marques</u>	DATE <u>6/23/2008</u>

(This space for State use only)

RECEIVED
JUN 27 2008
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304739138
Well Name: NBU 1021-32E
Location: SWNW 1858 FNL & 651 FWL Sec. 32 T 10S R 21E
Company Permit Issued to: Kerr McGee Oil and Gas Onshore, LP
Date Original Permit Issued: 6/25/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Victoria Marquez
Signature

6/23/2008
Date


Title: Regulatory Intern

Representing: Kerr McGee Oil and Gas Onshore, LP

RECEIVED

JUN 27 2008

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9																														
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-21577																														
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:																														
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES																														
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1021-32E																														
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1858 FNL 0651 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 32 Township: 10.0S Range: 21.0E Meridian: S		9. API NUMBER: 43047391380000																														
PHONE NUMBER: 720 929-6007 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES																														
COUNTY: UTAH		STATE: UTAH																														
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA																																
TYPE OF SUBMISSION	TYPE OF ACTION																															
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 7/3/2009 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<table style="width: 100%; border: none;"> <tr> <td><input type="checkbox"/> ACIDIZE</td> <td><input type="checkbox"/> ALTER CASING</td> <td><input type="checkbox"/> CASING REPAIR</td> </tr> <tr> <td><input type="checkbox"/> CHANGE TO PREVIOUS PLANS</td> <td><input type="checkbox"/> CHANGE TUBING</td> <td><input type="checkbox"/> CHANGE WELL NAME</td> </tr> <tr> <td><input type="checkbox"/> CHANGE WELL STATUS</td> <td><input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS</td> <td><input type="checkbox"/> CONVERT WELL TYPE</td> </tr> <tr> <td><input type="checkbox"/> DEEPEN</td> <td><input type="checkbox"/> FRACTURE TREAT</td> <td><input type="checkbox"/> NEW CONSTRUCTION</td> </tr> <tr> <td><input type="checkbox"/> OPERATOR CHANGE</td> <td><input type="checkbox"/> PLUG AND ABANDON</td> <td><input type="checkbox"/> PLUG BACK</td> </tr> <tr> <td><input type="checkbox"/> PRODUCTION START OR RESUME</td> <td><input type="checkbox"/> RECLAMATION OF WELL SITE</td> <td><input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION</td> </tr> <tr> <td><input type="checkbox"/> REPERFORATE CURRENT FORMATION</td> <td><input type="checkbox"/> SIDETRACK TO REPAIR WELL</td> <td><input type="checkbox"/> TEMPORARY ABANDON</td> </tr> <tr> <td><input type="checkbox"/> TUBING REPAIR</td> <td><input type="checkbox"/> VENT OR FLARE</td> <td><input type="checkbox"/> WATER DISPOSAL</td> </tr> <tr> <td><input type="checkbox"/> WATER SHUTOFF</td> <td><input type="checkbox"/> SI TA STATUS EXTENSION</td> <td><input checked="" type="checkbox"/> APD EXTENSION</td> </tr> <tr> <td><input type="checkbox"/> WILDCAT WELL DETERMINATION</td> <td><input type="checkbox"/> OTHER</td> <td>OTHER: _____</td> </tr> </table>		<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____
<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR																														
<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME																														
<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE																														
<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION																														
<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK																														
<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION																														
<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON																														
<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL																														
<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION																														
<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____																														
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.																																
<div style="text-align: right;"> Approved by the Utah Division of Oil, Gas and Mining </div>		Date: June 30, 2009																														
<div style="text-align: right;"> By:  </div>																																
NAME (PLEASE PRINT) Danielle Piernot		PHONE NUMBER 720 929-6156																														
SIGNATURE N/A		TITLE Regulatory Analyst																														
		DATE 6/30/2009																														



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047391380000

API: 43047391380000

Well Name: NBU 1021-32E

Location: 1858 FNL 0651 FWL QTR SWNW SEC 32 TWNP 100S RNG 210E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 6/25/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Danielle Piernot

Date: 6/30/2009

Title: Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date: June 30, 2009

By: 

RECEIVED June 30, 2009



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

July 8, 2010

Kerr McGee O&G Onshore LP
1368 South 1200 East
Vernal, Utah 84078

43 047 39138
NBU 1021-32E
IDS 21E 32

Re: APDs Rescinded for Kerr McGee Oil & Gas Onshore LP Uintah County


Ladies and Gentlemen:

Enclosed find the list of APDs that are being rescinded to Kerr McGee Oil & Gas Onshore LP. No drilling activities at these locations have been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective July 8, 2010.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
SITLA, Ed Bonner



Natural Buttes Unit 921-16P	43-047-39254
Natural Buttes Unit 1021-32D	43-047-39137
Natural Buttes Unit 1021-32E	43-047-39138
Natural Buttes Unit 1021-19M	43-047-38150
Natural Buttes Unit 1021-32C	43-047-39028
Natural Buttes Unit 1021-32F	43-047-39029
State 1021-32N	43-047-39129
State 1021-32M	43-047-39130
State 1021-32K	43-047-39132
State 1021-28P	43-047-39096
State 1021-28N	43-047-39097
State 1021-28L	43-047-39099
State 1021-28F	43-047-39100
State 1021-28E	43-047-39101
State 1021-28D	43-047-39102
State 1021-28C	43-047-39103
State 1021-28B	43-047-39104
State 1021-28K	43-047-39105
State 1021-28I	43-047-39106
Love 1121-16C	43-047-39143
Love 1121-16E	43-047-39144
Love 1121-16G	43-047-39145
Love 1121-16I	43-047-39146
Love 1121-16K	43-047-39147
Love 1121-16M	43-047-39148
Love 1121-16O	43-047-39149